




# Pandigital Super Nova Battery Replacement

How to replace the battery of your Pandigital Super Nova.

Written By: pfcprice

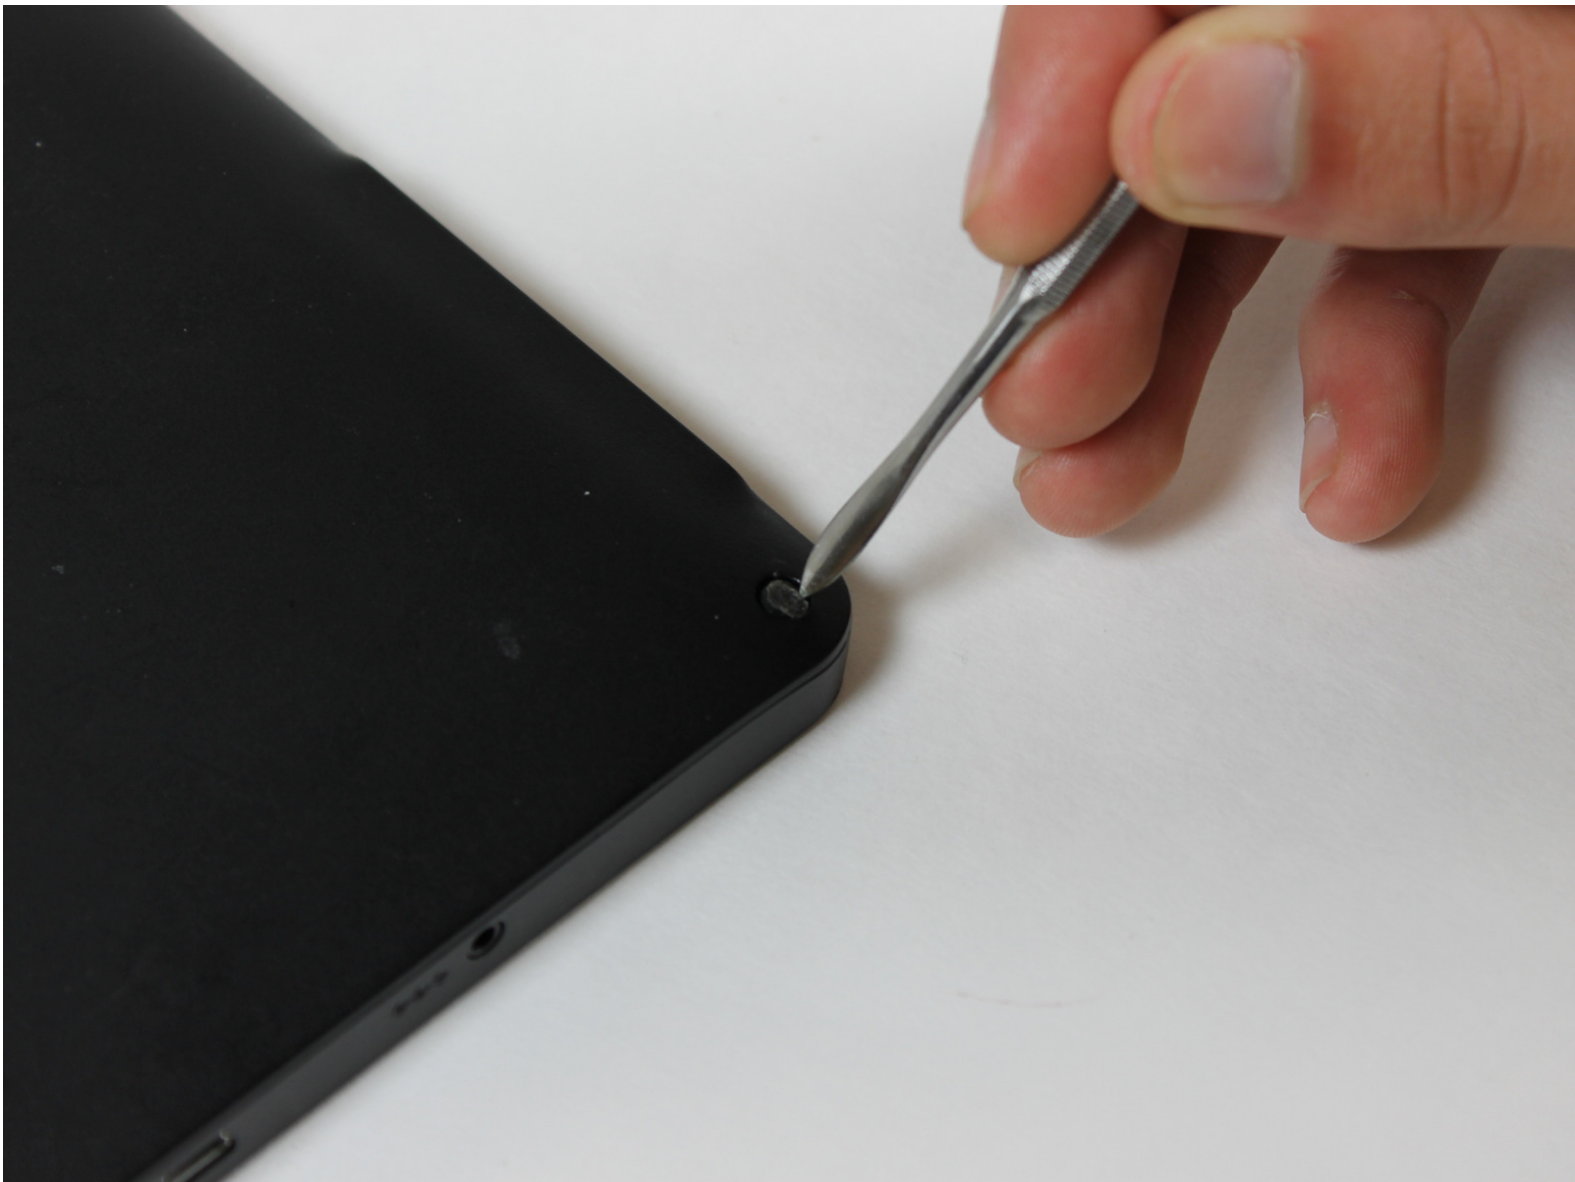

## INTRODUCTION

This guide demonstrates how to remove and replace a Pandigital Super Nova battery and preserve the function of your device.


---



### TOOLS:


- [Metal Spudger Set](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
  - [Tweezers](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Battery

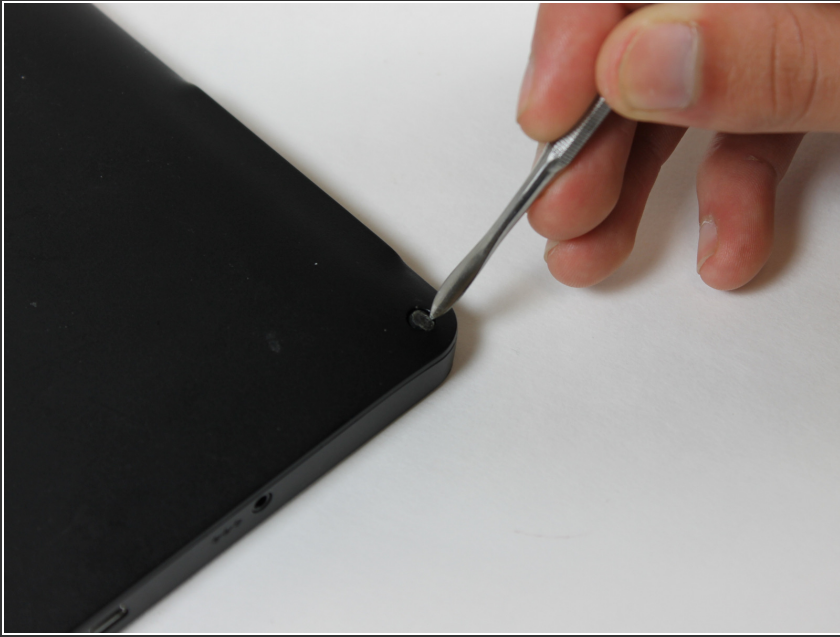

- Remove the screw covers from each corner of the back side of the device.
- Set aside.

## Step 2

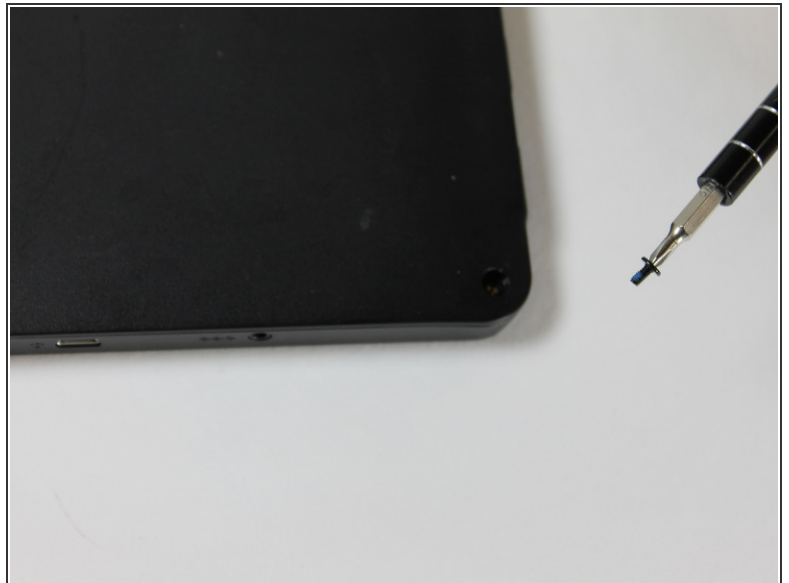


- Using a Philips screwdriver, remove all four .15 mm screws from each corner.
- Set aside.

## Step 3



- Using the plastic opening tool, remove the back cover of the device.


## Step 4

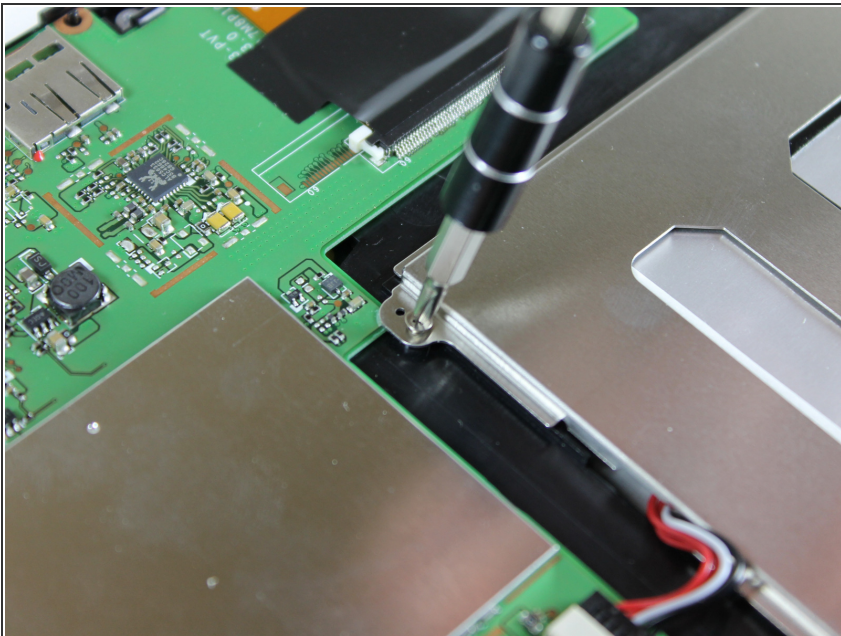

- Remove the three .11 mm screws that hold the battery in place.
- Set aside.



## Step 5

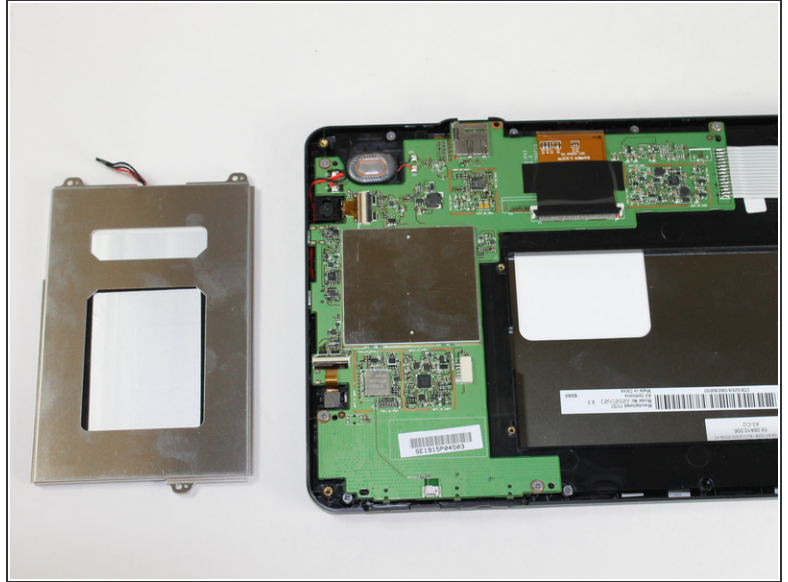

- Unplug the battery and remove from device.

⚠ Caution: avoid touching the motherboard as it is fragile.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-12-04 06:11:11 PM.